

**Standard : LED EMERGENCY BACKUP PACK**

**Model: LEB20UNV**

**[SPECIFICATIONS]**

Input voltage :	AC 120 - 277V, 50/60Hz
Input Power :	4W (Max.)
Output voltage :	DC 135V
Output current :	0.13A (Max.)
Output power	18W (Max.)
Battery :	LiFePO4 battery, 12.8V 3000mAh
Recharging time	24 hours
Discharging time	90 min
Operating ambient Temp. :	10 ~ 50 °C
Dimension :	L : 345 mm, W : 56.6 mm, H : 32.6 mm
Weight :	0.9 Kg


**[PRODUCT ADVANTAGES]**

- Suitable for luminaire 120VAC input 1~18W internal or external LED driver.
- High surge voltage protect. (ANSI standard).
- Product without UL certificate but design according UL.
- Battery charge and discharge protection.
- Two mounting configurations available.
- Long-life, LiFePO4 Battery with 5 years lift time.
- RoHS Compliant.
- Suitable for damp location.

**Standard : LED EMERGENCY BACKUP PACK**

**Model: LEB20UNV**


**[DIMENSION]**

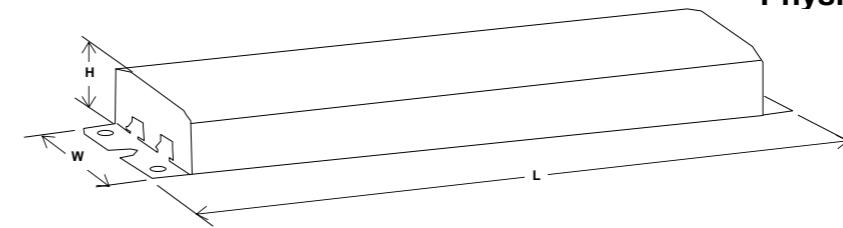

**Physical Parameters : inch / cm**

**L : 13.58/34.5**  
**W : 2.19/5.56**  
**H : 1.28/3.26**

**[WIRING DIAGRAM]**

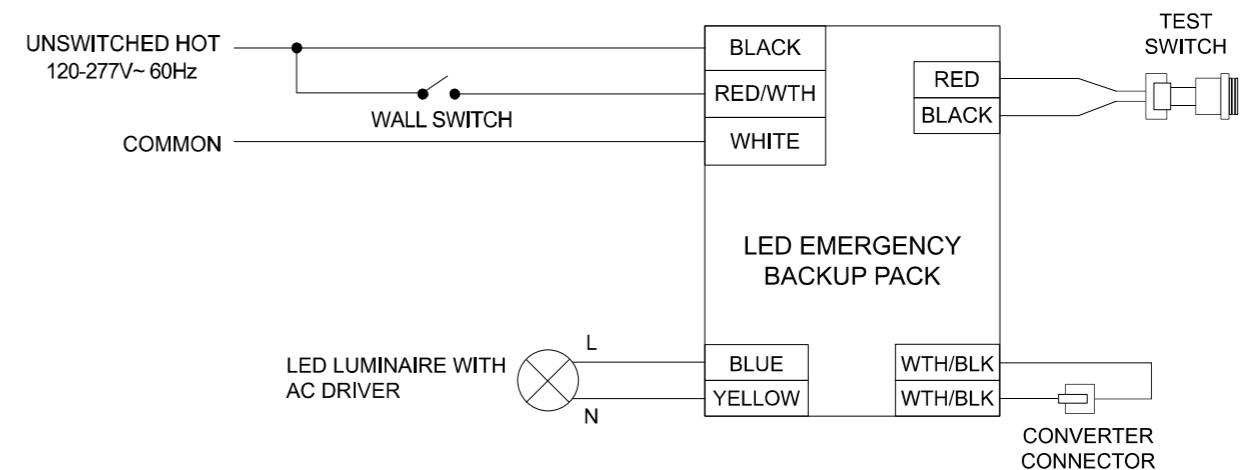

**[PICTURE]**

