

Standard : LED EMERGENCY BACKUP PACK

Model: LEB25UNV

[SPECIFICATIONS]

Input voltage :	AC 120 - 277V, 50/60Hz
Input Power :	5W (Max.)
Output voltage :	DC 135V
Output current :	0.19A (Max.)
Output power :	25W (Max.)
Battery :	LiFePO4 battery, 16V 3200mAh
Recharging time :	24 hours
Discharging time :	90 min
Operating ambient Temp. :	10 ~ 50 °C
Dimension :	L : 410 mm, W : 56.6 mm, H : 32.6 mm
Weight :	TBD


[PRODUCT ADVANTAGES]

- Suitable for luminaire 120VAC input 1~25W internal or external LED driver.
- High surge voltage protect. (ANSI standard).
- Product without UL certificate but design according UL.
- Battery charge and discharge protection.
- Two mounting configurations available.
- Long-life, LiFePO4 Battery with 5 years lift time.
- RoHS Compliant.
- Suitable for damp location.

Standard : LED EMERGENCY BACKUP PACK

Model: LEB25UNV


[DIMENSION]

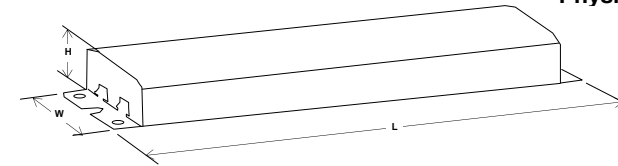

Physical Parameters : inch / cm

L : 16.16/41
W : 2.19/5.56
H : 1.28/3.26

[WIRING DIAGRAM]

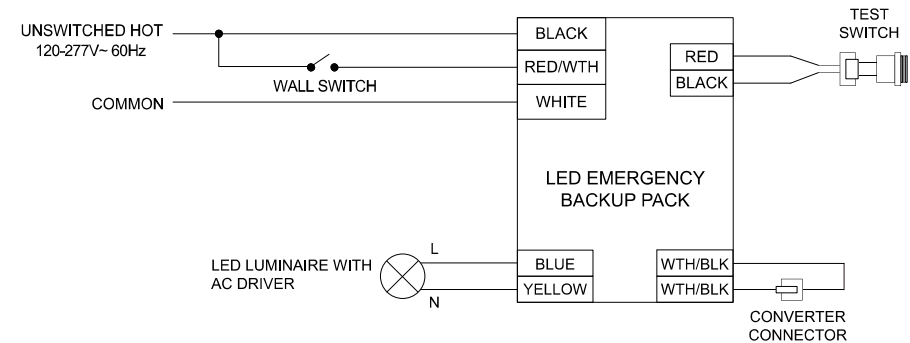

[PICTURE]

